


UNCONTROLLED  
For Reference Only

MB 4/25/2005

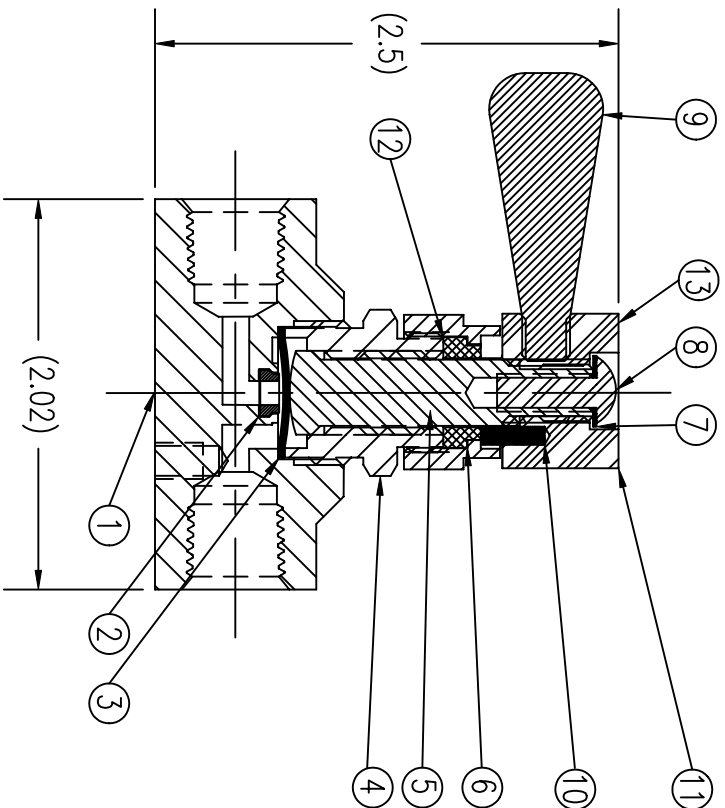

| ITEM | PART NAME           | MATERIAL                    | QTY |
|------|---------------------|-----------------------------|-----|
| 1    | BODY                | NICKEL PLATED BRASS CDA-360 | 1   |
| 2    | SEAT INSERT         | PCTFE                       | 1   |
| 3    | DIAPHRAGM ASSY.     | 316L SST/COPPER             | 1   |
| 4    | BONNET              | 303 SST                     | 1   |
| 5    | STEM                | 416 SST                     | 1   |
| 6    | POSITIONER LOCK NUT | NICKEL PLATED BRASS CDA-360 | 1   |
| 7    | LOCK WASHER         | 18-8 SST                    | 1   |
| 8    | SCREW               | 18-8 SST                    | 1   |
| 9    | HANDLE              | ALUMINUM- NOTE 3            | 1   |
| 10   | STOP PIN            | ALLOY STEEL                 | 1   |
| 11   | COLLAR              | ALUMINUM                    | 1   |
| 12   | POSITIONER GLAND    | NICKEL PLATED BRASS CDA-360 | 1   |
| 13   | LABEL               | VINYL/MYLAR                 | 1   |

SPECIFICATIONS:

PRESSURE RATING: 3500 PSI

FLOW COEFFICIENT  $C_v = .13$

SEAT ORIFICE SIZE: .125  $\phi$

SEAT MATERIAL: PCTFE

TEMPERATURE LIMITS:

-65° F TO 150° F

MAX. ALLOWABLE SEAT LEAKAGE:


2 x 10-8 ATM CC/SEC He

MAX. INBOARD LEAKAGE:

2 x 10-8 ATM CC/SEC He

WETTED SURFACES: PCTFE,

316L SST, NICKEL PLATED BRASS CDA-360

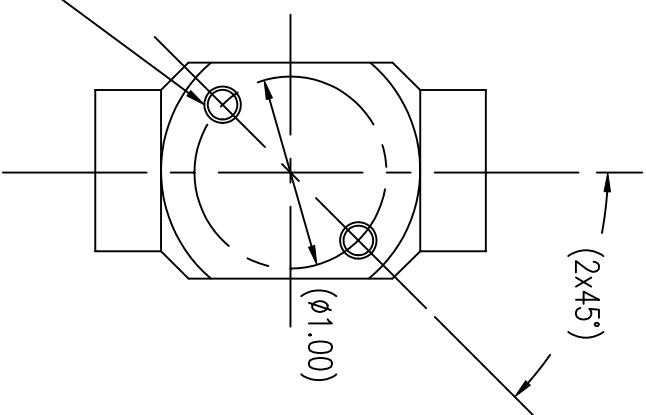

2x .190-32UNF-2B THREAD

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. HANDLE SHOWN IN OPEN POSITION.
3. HANDLE IS CLEAR ANODIZED.

*GasFlo Products Inc.*  
*Fairfield, N.J.*

SALES DRAWING- 1/4" x 1/4" FNPT  
QUARTER TURN PACKLESS BARSTOCK VALVE

THIS DOCUMENT CONTAINS INFORMATION THAT IS THE PROPRIETARY AND CONFIDENTIAL PROPERTY OF GASFLO PRODUCTS INC. AND MAY BE USED ONLY FOR AUTHORIZED PURPOSES.  
THIS DOCUMENT MAY NOT BE REPRODUCED WITHOUT GASFLO PRODUCTS INC. PRIOR WRITTEN CONSENT

DWN: MB  
SCALE: 1:1  
DATE: 4/25/05

DWG: SALES-VLV-QSL-44CH-FF