


LETTER	REVISIONS	DATE
A	ADDED ITEM 16 TO B.O.M.	1/28/2005

ITEM	PART NAME	MATERIAL	QTY
1	PANEL NUT	303 SST	2
2	BODY	316L SST	1
3	SEAT	PCrFE	1
4	SPRING SUPPORT	316L SST	1
5	SPRING	316L SST	1
6	SPRING RETAINER	316L SST	1
7	LOWER STEM	316L SST	1
8	DIAPHRAGM	ELGILOY	4
9	BUTTON ASSY.	316L/PFRP	1
10	BONNET	316L SST	1
11	BONNET NUT	302 SST	1
12	UPPER STEM	416 SST	1
13	HANDLE	ALUMINUM	1
14	SCREW	18-8 SST	1
15	LABEL	VINYL/MYLAR	1
16	LOCKWASHER	SST	1

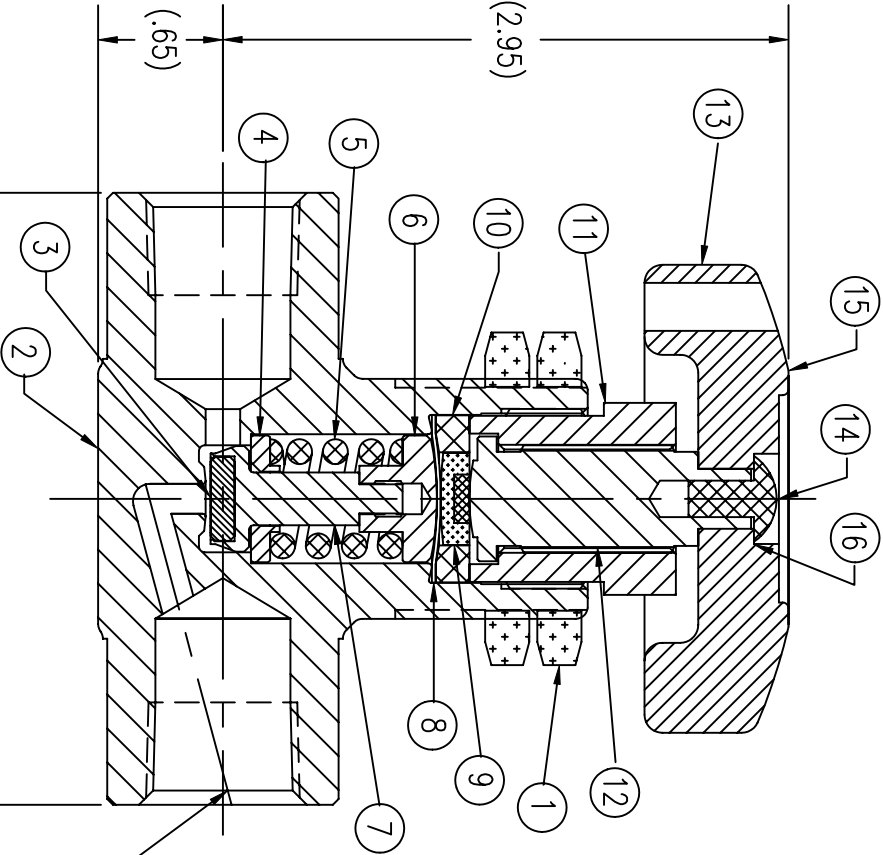

SPECIFICATIONS:
 PRESSURE RATING: 0 PSIA TO 3000 PSIG @ 70°F
 FLOW COEFFICIENT C_v = .30
 SEAT ORIFICE SIZE: .156 Ø
 LEAK RATE: BELOW 2 x 10-8 CC/SEC-ATM He
 MOUNTS IN PANEL UP TO 5/16 THICK WITH
 1 1/4 TO 1 7/16 Ø HOLE

UNCONTROLLED
 For Reference Only
 MB 3/30/2007

GasFlo Products Inc.
Fairfield, N.J.

SALES DWG.- 1/2 FEMALE NPT x 1/2 FEMALE NPT
 SST SPRING TYPE DIAPHRAGM VALVE

THIS DOCUMENT CONTAINS INFORMATION THAT IS THE PROPRIETARY AND CONFIDENTIAL PROPERTY OF GASFLO PRODUCTS INC. AND MAY BE USED ONLY FOR AUTHORIZED PURPOSES. THIS DOCUMENT MAY NOT BE REPRODUCED WITHOUT GASFLO PRODUCTS INC. PRIOR WRITTEN CONSENT

DWN	MB	SCALE: NTS
APPVD		DATE 9/09/03

DWG	SALES-VLV-ST-88SS-FF	REV. A
-----	----------------------	--------